

## PISTON SENSING PRESSURE REDUCING VALVE PRV 41SS DN 1/4" – 1/2" ; DN10 – DN15


### DESCRIPTION

The ADCA PRV41 series **direct acting, springloaded piston sensing, balanced valve** pressure reducing valves, are designed for use on compressed air, water and other gases or liquids compatible with the materials of construction.

They are suitable for pressure reducing stations at the point of use on different industrial applications. Connections are female screwed or flanged.

### MAIN FEATURES

Compact design.  
Balanced valve.  
Machined from barstock materials..

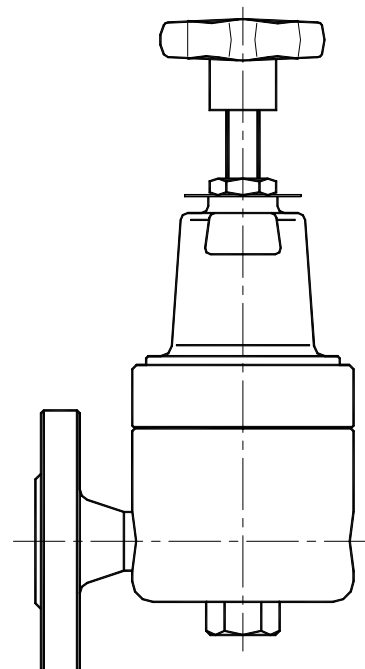

### OPTIONS:

Different soft valves for water and gases.  
Relieving-Internal relief valve to allow reduce outlet pressure in a no-flow condition.  
Built-in strainer.  
Outlet 1/4" gauge connection on body.  
Regulating screw with top cap.

### USE:

Compressed air, water and other gases and liquids compatible with the construction.

### AVAILABLE MODELS:

PRV41/SS – Stainless steel.

### SIZES:

DN 1/4" - DN 1/2"  
DN 10 - DN 15

### CONNECTIONS:

Female screwed ISO7/1Rp(BS 21) or NPT.  
Flanged EN 1092-1 PN63 - PN320.  
Special flanges upon request.

### INSTALLATION:

Horizontal or vertical installation.  
An "Y" strainer should be provided upstream the valve.  
See IMI, installation and maintenance instructions

### ORDER

### REQUIREMENTS :

Type of fluid  
Maximum operating temperature  
Inlet pressure and required outlet pressure  
Capacity (maximum and minimum).

CAPACITIES		
Valve Size	10	15
KVs (m3/h)	1,5	2


LIMITING CONDITIONS	
Valve model	PRV31SS
Body design conditions	PN 320
Max.upstream pressure	220 bar
Max.downstream pressure	50 bar
Min.downstream pressure	3 bar
Max.design temperature *	80 °C
Max.recommended reducing ratio	40:1

\*Other on request.

CE MARKING (PED - European Directive 97/23/EC)	
PN 320	Category
DN10 to 15	SEP - art. 3, paragraph3

DIMENSIONS (mm)-Screwed					EN 1092-1 Flanges		
SIZE DN	A	B	C	WGT. Kgs	D*	E	WGT. Kgs
1/4"	80	35	200	2,7	-	-	-
3/8"	80	35	200	2,7	-	-	-
1/2"-15	80	35	200	2,7	150	47,5	4,1


\* Different lengths on request.

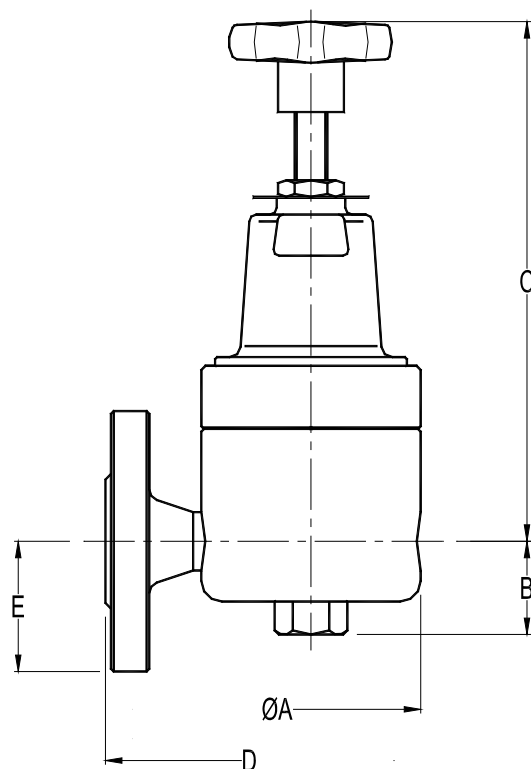

MATERIALS		
POS.	DESIGNATION	MATERIAL
1	VALVE BODY	AISI316 / 1.4401 ; CF8M / 1.4408
1A	PISTON SLEEVE	AISI316 / 1.4401 ; CF8M / 1.4408
2	TOP COVER	AISI316 / 1.4401 ; CF8M / 1.4408
3	SEAT COVER	AISI316 / 1.4401
4	* O-RING	NBR
5	* PISTON VALVE	AISI316 / 1.4401
6	* VALVE HEAD	NBR-EPDM-PTFE, etc
6A	PUSHROD	AISI304 / 1.4301
6B	* VALVE SEAT	HARDENED ST. STEEL
7	* O-RING	NBR-EPDM-PTFE, etc
8	* VALVE SPRING	AISI302 / 1.4300
8A	* STRAINER SCREEN	AISI304 / 1.4301
9	PISTON	AISI316 / 1.4401
9A	O -RING	NBR-EPDM-PTFE, etc
11A	O -RING	NBR-EPDM-PTFE, etc
12	GASKET	ALUMINIUM
13	SPRING PLATE	AISI304 / 1.4301
15	* ADJUSTMENT SPRING	SPRING STEEL
16	TOP SPRING PLATE	BRASS
17	ADJUSTMENT SCREW	AISI304 / 1.4301
18	LOCKNUT	ST. STEEL A2-70
19	HANDWHEEL	PLASTIC
20	SPRING IDENT. PLATE	ALUMINIUM

\* Available spare parts.

Remarks: All valves has a serial number. In case of non-standard valves this number must be supplied if spare parts are ordered.

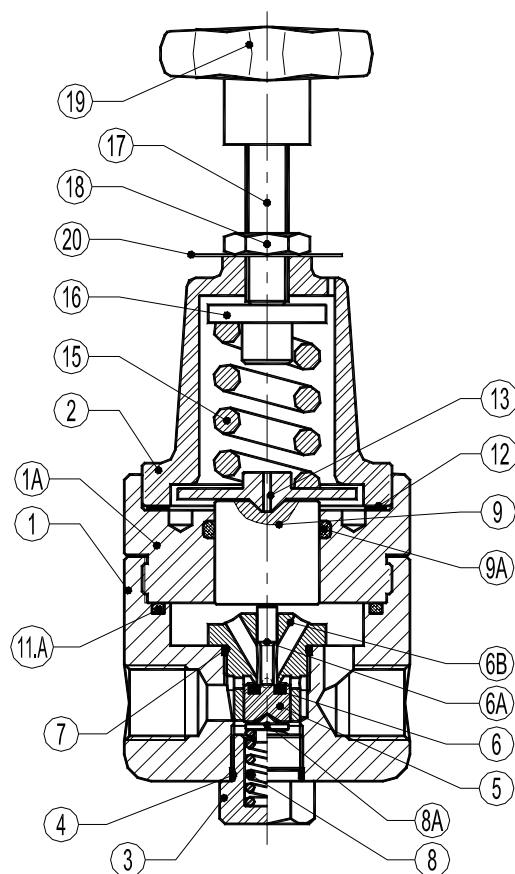



ORDERING CODES PRV41										
<b>Valve Model</b>	R41	.	1	W	N	C		.		15
PRV41SS - Piston sensing	R41									
<b>Outlet spring range</b>										
N°5 - 3 to 30 bar			5							
N°6 - 5 to 50 bar			6							
<b>Application</b>										
Water				W						
Gases				G						
Oxygen (Degreased)				O						
<b>Seal material</b>										
NBR					N					
EPDM					E					
PTFE					T					
FPM/VITON					V					
<b>Maximum inlet pressure</b>										
80 bar						E				
220 bar						F				
<b>Gauge port 1/4"</b>										
Without gauge ports								(1)		
Gauge port on the left side (Related to the flow direction)								1		
Gauge port on the right side (Related to the flow direction)								3		
Gauge ports on both sides								2		
<b>Relieving</b>										
Non-relieving								(1)		
Relieving (Only for non-dangerous gases)								R		
<b>Pipe connection</b>										
Threaded BSP ISO 7/1 Rp									A	
Threaded NPT ANSI B1.20.1									C	
Socket weld SW ANSI B16.11									H	
Butt weld BW ANSI B16.25									I	
Flanged EN1092-1 PN40									N	
Flanged EN1092-1 PN63									O	
Flanged ANSI B16.5 150#									U	
Flanged ANSI B16.5 300#									V	
Flanged ANSI B16.5 600#									W	
<b>Size</b>										
DN 1/4"										08
DN 3/8"										10
DN 1/2" or DN 15										15
<b>Special valves / Extras b)</b>										
										E

(1) Omitted if a standard valve is requested

b) Full description or additional codes has to be added in case of non-standard combination.